




ITALIAN STYLE FOR LIFTS

ITALIANO/ ENGLISH

# **TOUCH PUSH BUTTON**

**Rev.8**

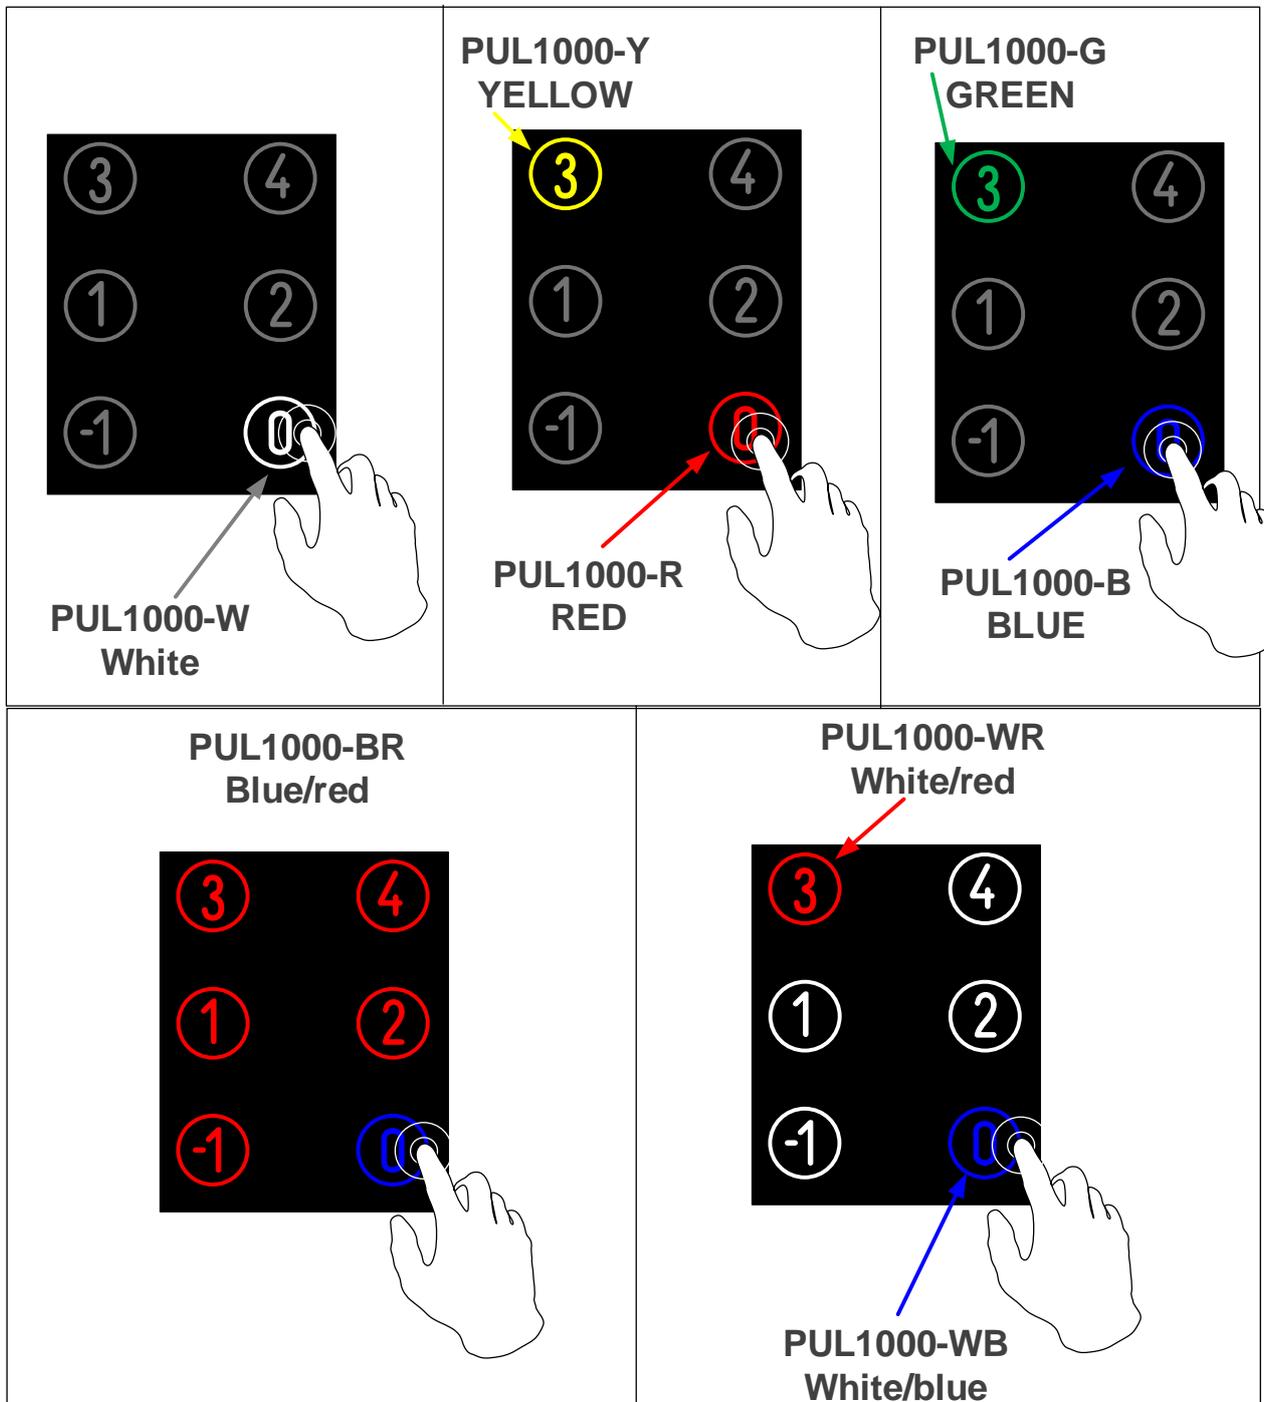


## DATI TECNICI/ TECHNICAL DATA

<b>[IT] ALIMENTAZIONE* / [EN] POWER SUPPLY*</b>	12-24 VDC $\pm$ 10%
<b>[IT] CORRENTE ASSORBITA MAX./ [EN] MAX. ABSORPTION</b>	12Vdc $\rightarrow$ 130 mA 24Vdc $\rightarrow$ 75 mA
<b>[IT] CONTATTO RELÈ / [EN] RELAY CONTACT</b>	30 VDC, 1A
<b>[IT] RANGE TEMPERATURA FUNZIONAMENTO / [EN] TEMPERATURE RANGE, WORKING MODE</b>	-15°C / +50°C
<b>[IT] MAX. SPESSORE VETRO / [EN] MAX GLASS THICKNESS</b>	6 mm

\*[IT] NOTA : La tensione di alimentazione deve essere raddrizzata e livellata;  
[EN] NOTE: The power supply voltage must be rectified and steady.

# PINOUT

**[IT] IMPORTANTE**  
**[EN] IMPORTANT!**  
 [IT] Collegare a terra!  
 [EN] Connect to ground!

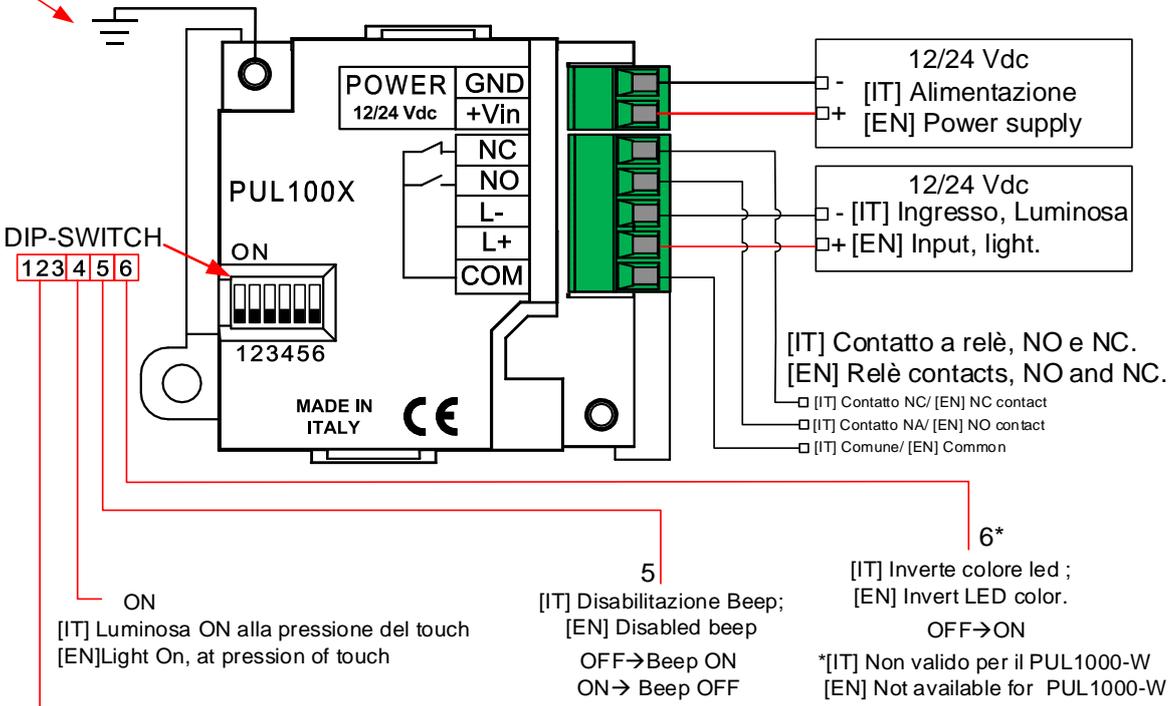

[IT] LIVELLO SENSIBILITA' TOUCH  
 [EN] TOUCH SENSIBILITY LEVEL

	1	2	3
Level 0	OFF	OFF	OFF
Level 1	ON	OFF	OFF
Level 2	OFF	ON	OFF
Level 3	ON	ON	OFF
Level 4	OFF	OFF	ON
Level 5	ON	OFF	ON
Level 6	OFF	ON	ON
Level 7	ON	ON	ON

**[IT] Funzionamento del contatto:**  
**[EN] Contact working mode:**  
 [IT] Pressione veloce (<1 sec): relè abilitato per un secondo  
 Pressione massima= fino a 20 sec  
 [EN] Quick press (<1 sec): relè on for 1 second  
 Max pressing time= up to 20 sec

**[IT] NOTA:** Per salvare le modifiche dei dip-switches scollegare e ricollegare l'alimentazione del pulsante  
**[EN] NOTE:** To save dip-switches modifications turn off and then on the push button power supply

\*Per far funzionare il BUZZER collegare anche L- e L+  
 To make the BUZZER work, also connect L- and L+

## LUMINOSA/ LIGHT


<b>[IT] CODICE [EN] CODE</b>	<b>[IT] INGRESSO L+, L-/ [EN] INPUT L+, L-</b>	<b>[IT] LUMINOSA/ [EN] LIGHT</b>
<b>PUL1000-W</b>	OFF	Bianco/White (10% on)
	ON	Bianco/White (100% on)
<b>PUL1000-G</b>	OFF	Verde /Green (10% on)
	ON	Verde /Green (100% on)
<b>PUL1000-B</b>	OFF	Blu /Blue (10% on)
	ON	Blu /Blue (100% on)
<b>PUL1000-Y</b>	OFF	Giallo /Yellow (10% on)
	ON	Giallo /Yellow (100% on)
<b>PUL1000-R</b>	OFF	Rosso/Red (10% on)
	ON	Rosso/Red (100% on)
<b>PUL1000-BR</b>	OFF	Blu/Blue (100% on)
	ON	Rosso/Red (100% on)
<b>PUL1000-WR</b>	OFF	Bianco/White (100% on)
	ON	Rosso/Red (100% on)
<b>PUL1000-WB</b>	OFF	Bianco/White (100% on)
	ON	Blu/Blue (100% on)

# [IT] ESEMPI DI COLLEGAMENTO

# [EN] CONNECTION EXAMPLES


[IT] 1.INGRESSO/USCITA DA QUADRO CON COMUNE POSITIVO.

[EN] 1. INPUT/OUTPUT FROM CONTROL PANEL WITH POSITIVE COMMON.

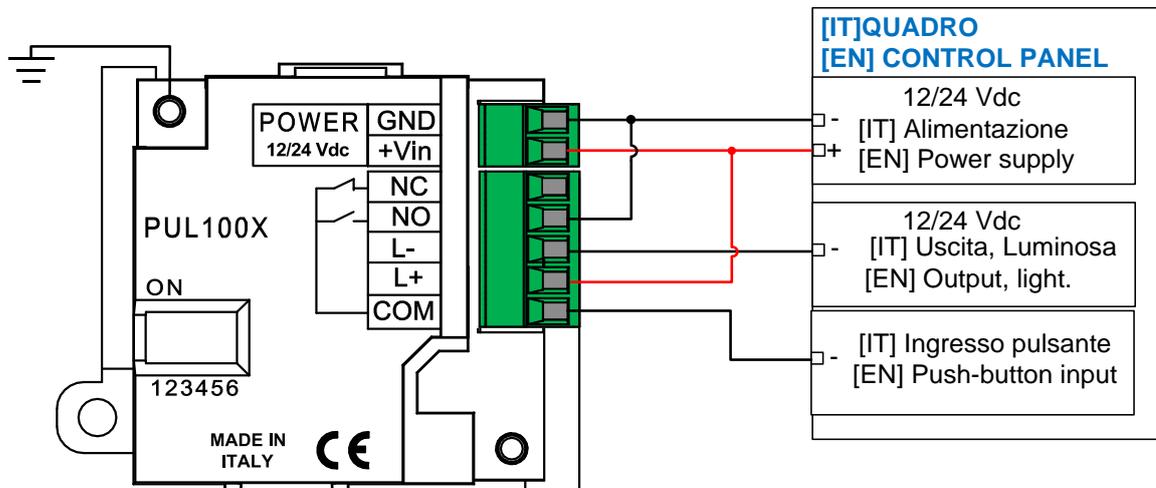


[IT] 2.INGRESSO/USCITA DA QUADRO CON COMUNE NEGATIVO.

[EN] 2. INPUT/OUTPUT FROM CONTROL PANEL WITH NEGATIVE COMMON.

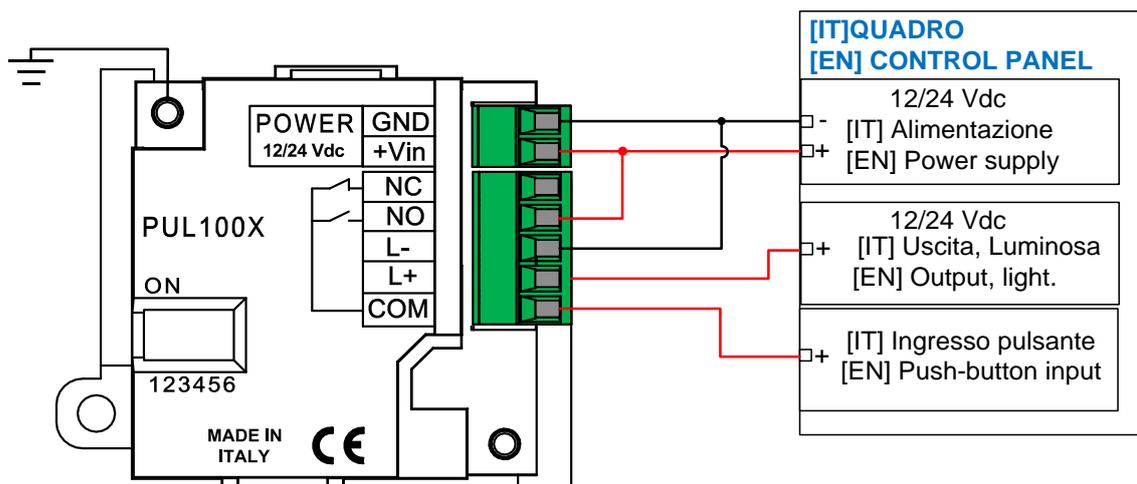


[IT] 3.QUADRO SENZA USCITA

[EN] 3. CONTROL PANEL WITHOUT OUTPUT.

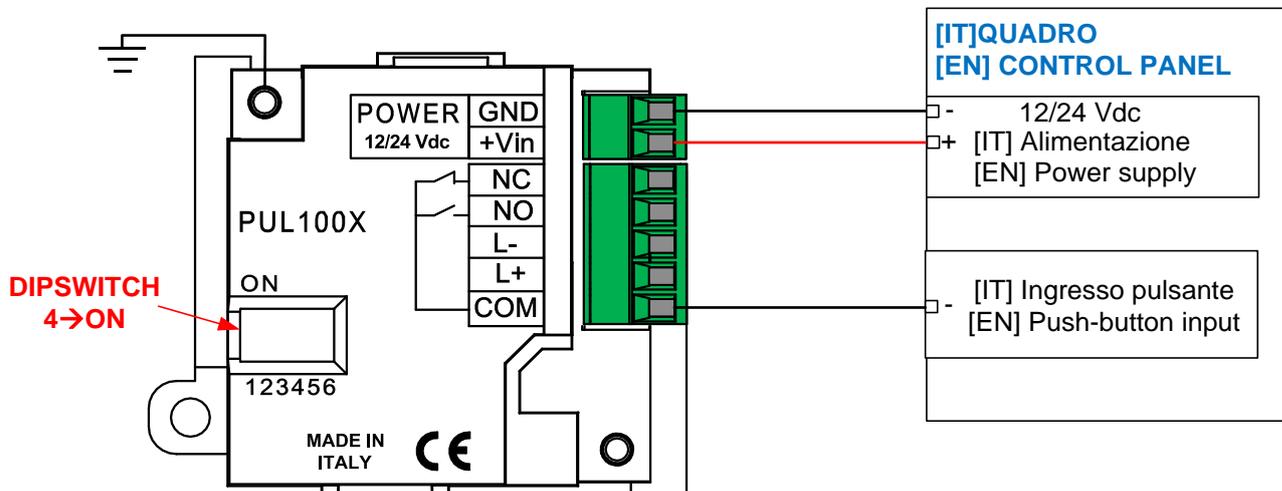


# DIMENSIONI / DIMENSIONS


[IT] VISTA FRONTALE  
[EN] FRONT VIEW

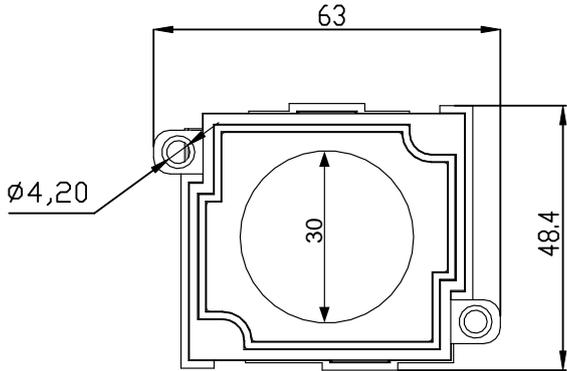



[IT] VISTA LATERALE  
[EN] SIDE VIEW

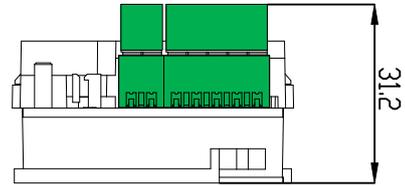

[IT] INGOMBRO MASSIMO  
[EN] MAXIMUM SIZE

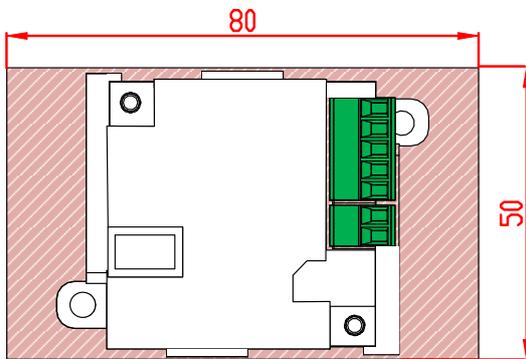

[IT] FISSAGGIO  
[EN] FIXING

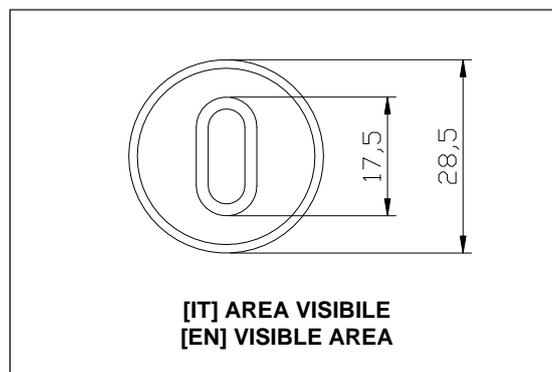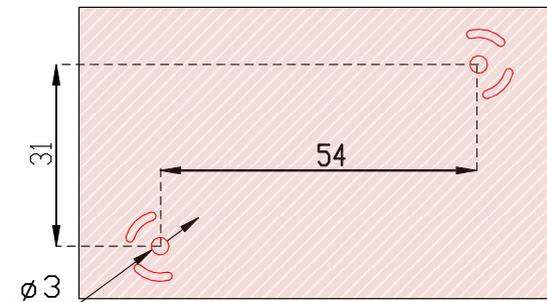

[IT] Tutte le dimensioni sono in mm.  
[EN] All dimensions are in mm.